## GENERAL NOTES

1. PROVIDE EROSION PROTECTION AS REQ'D BY ALL GOVERNING AUTHORITIES.

2. PROVIDE P.T. WD. WHERE IN CONTACT W/ EPOM ROOFING, FLASHING WATERPROOFING, MASONARY, CONCRETE OR EARTH.

3. ALL WOOD FASTENERS, HANGERS, ETC. IN CONTACT w/. P.T. WD. TO RECEIVE MIN. G90 GALV OR GREATER AS REQD. BY FASTENER MFR. FOR TYPE OF P.T. CHEMICAL USED AND/OR ENVIROMENT.

4. CONFORM TO ELECRIC REQTS. OF NEC 2002 INCL. GFIC RECEPTS.

& GROUNDING OF CONC. SLABS ANIMAL USE AREAS.

5. LIGHTNING PROTECTION WILL BE INSTALLED COMPLYING w/ NFPA 780

6. FRAMING POSTS P.T. ? MAIN POSTS P.T. ? DOOR POSTS

7. CONC. FOOTERS ARE SIZED ASSUMING A

MIN. SOIL BEARING CAPACITY OF 3000 PSF

8. CONCRETE SLAB TO BE MIN. 4" THICK WITH WIRE-MESH

9. TOTAL AREA UNDER ROOF (INCLUDES OVERHANGS) - ? SQ.F.

DO NOT SCALE DIMENSIONS OFF DRAWINGS. USE WRITTEN OR CALCULATED DIMENSIONS

ALL CONTRACTORS ARE RESPONSIBLE FOR CHECKING DIMENSIONS BEFORE ESTIMATING, ORDERING OR STARTING WORK.

ALL WORK SHALL CONFORM TO CODES AND REQUIREMENTS OF LOCAL, COUNTY, STATE, NATIONAL BUILDING SAFETY CODES AND OTHER AGENCIES AND AUTHORITIES HAVING JURISDICTION OVER THE PROJECT.

## CODE INFO. ON STRUCTURE:

CONSTRUCTION TO CONFORM WITH DESIGN DOCUMENTS & ALL CODE REQTS.

1. FOUNDATIONS DESIGNED FOR ASSUMED ALLOWABLE NETSOIL BEARING PRESSURE OF 3000 PSF

- 2. DESIGN LIVE LOADINGS AS FOLLOWS: - LOFT (SECOND FLOOR) - 45 PSF
- LOFT (SECOND FLOOR) 45 PSF - SNOW: 45 PSF GROUND SNOW LOAD - WIND: 110 MPH (EXPOSURE C)
- SEISMIC USE GROUP: 1 - SITE CLASS: D
- SEISMIC FORCE RESIST: WD. FRAME - WEATHERING: SEVERE
- 3. DEAD LOADS AS FOLLOWS:
   MAIN ROOF RAFTERS w/. METAL 10 PSF

- LEAN-TO RAFTERS w/. METAL - 10 PSF - WOOD FLOORING - 10 PSF

- 4. PLACE FILL & BACKFILL IN MAX. 8" LIFTS. COMPACT EACH LAYER UNDER FOOTINGS & SLABS TO A DRY DENSITY OF MIN. 95%. DO NOT BUILD ON SOILS LESS THAN INDICATED DESIGN STRENGTH.
- 5. CONCRETE TO HAVE 28-DAY MIN. COMPRESSIVE STRENGTH AS FOLLOWS:
   4000 PSI AT EXT. SLABS
   3000 PSI ALL OTHER LOCATIONS
- PROVIDE COVERING OF REINF. PER IBC TABLE 1907.7.1 PROVIDE CORNER BARS TO MATCH CONTIN. REIFN. LAP ALL REINF. MIN 24" W.W.F. TO LAP MIN. 8".

6. ALL STRUCTURAL WOOD TO BE GRADED LUMBER - MIN. S.P.F. OR #2 HEM-FIR UNLESS NOTED OTHEWISE.

7. CONTRACTOR IS RESPONSIBLE OF MEANS OF CONSTRUCTION, INCL. PROVIDING GUYS, BRACING & SHORING AS REQUIRED FOR ALL LOADING CONDITIONS THROUGHTOUT CONSTRUCTION. CONTRACTOR IS NOT TO STORE MATERIALS IN EXCESS OF DESIGN LIVE LOADS WITHOUT APPROVAL OF ARCHITECTOR.

8. ALL STAIRS & RAILING TO CONFORM w/. LOADING REQTS. IN CODE

9. CONCRETE FLOOR SLAB-ON-GRADE TO INCLUDE CONTROL JOINTS A MAXIMUM OF 12' O.C. AND 1/4" OF THE SLAB THICKNESS. ALL TOPSOIL, ORGANICS AND CLAY TO BE REMOVED FROM FLOOR SLABS PRIOR TO CONCRETE OR FILL PALECEMENT. FILLS TO BE NON-EXPANSIVE GRANULAR SOIL, PLACED IN 6-8 INCH LIFTS AND COMPACTED TO 95% OF THE MAXIMUM PROCTOR DENSITY AND WITHIN 2% OF OPTIMUM MOISTURE CONTENT.

## SYMBOL LEGEND


9'-0"x8'-0" INS. O.H. GARAGE DOOR WITH WINDOWS

D2 3068 OUT-SWING ENTRY WITH 9-LITE WINDOW

 $\langle \mathrm{W1} 
angle$  30"x46" SINGLE HUNG VINYL INS. WINDOW

DETAIL NUMBER

A.1 SHEET DETAIL IS LOCATED





## BEFORE USING THIS PLAN:


YOU MUST FIRST CONFIRM THIS PLAN FOR CODE COMPLIANCE WITH AN ENGINEER OR YOUR LOCAL CODE OFFICIAL.

2. THIS PLAN IS NOT DESIGNED FOR HIGH WIND ZONES AND WILL NEED TO BE MODIFIED BY AN ENGINEER OR AN ARCHITECT TO COMPLY WITH HIGH WIND ZONE CODES.

3. IF THIS PLAN IS USED AS-IS WITHOUT FIRST CONFIRMING WITH AN ENGINEER, END USER SHALL BE FULLY RESPONSIBLE FOR ANY OR ALL CONSEQUENCES THAT MIGHT ARISE OUT OF USE OF THIS PLAN.

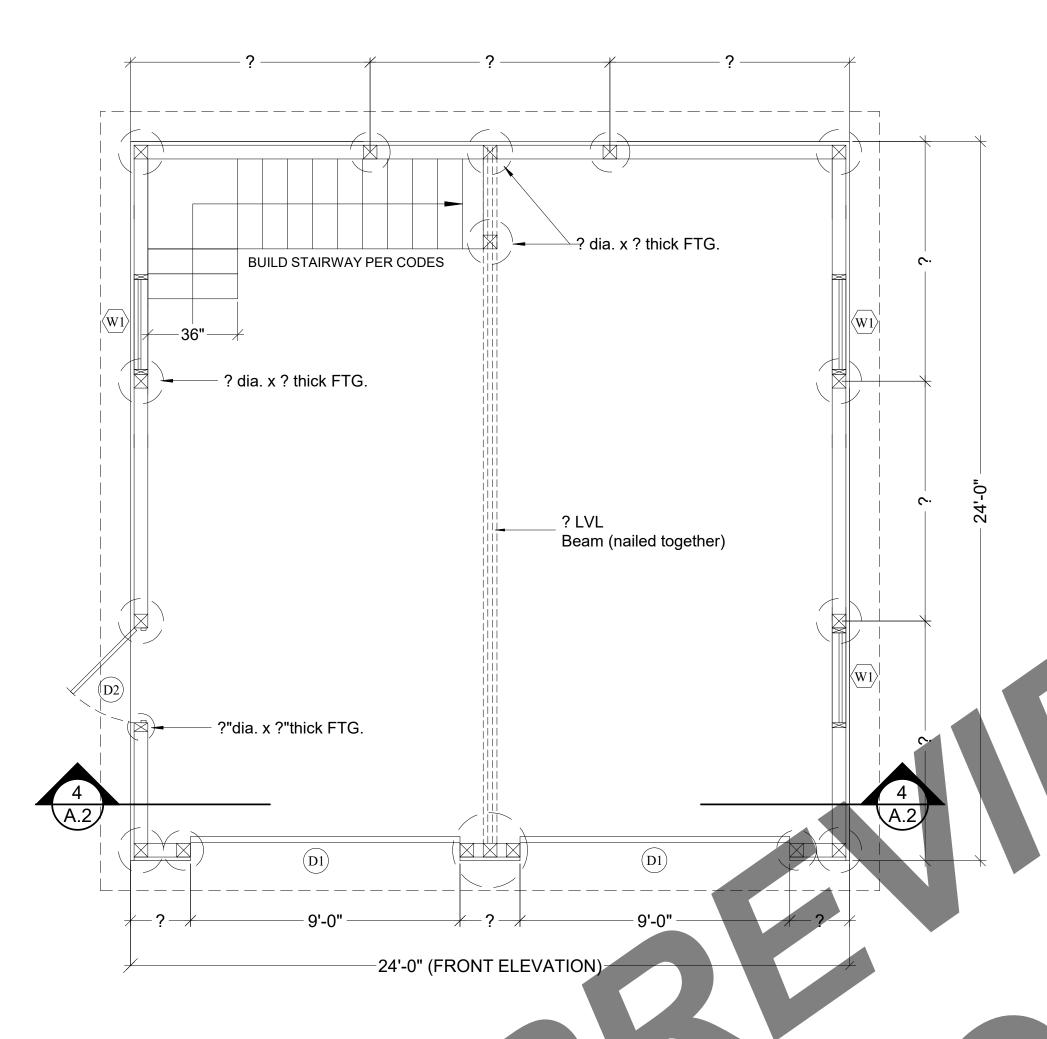

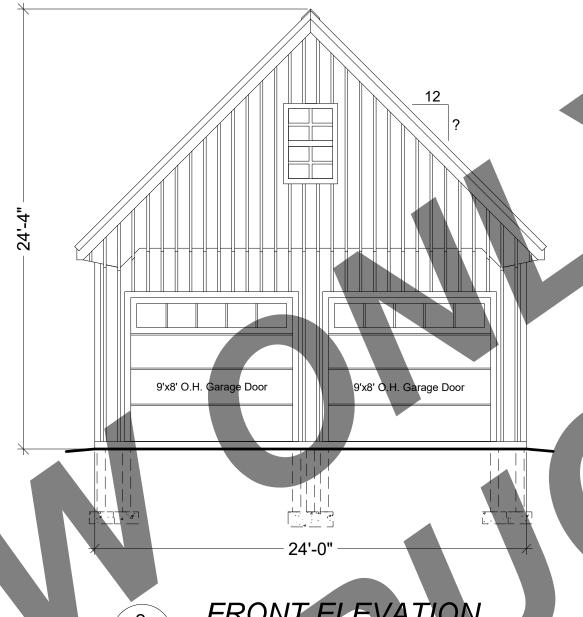

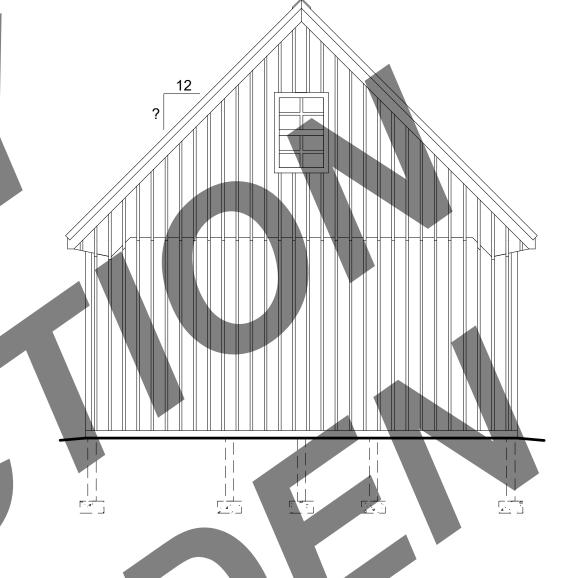













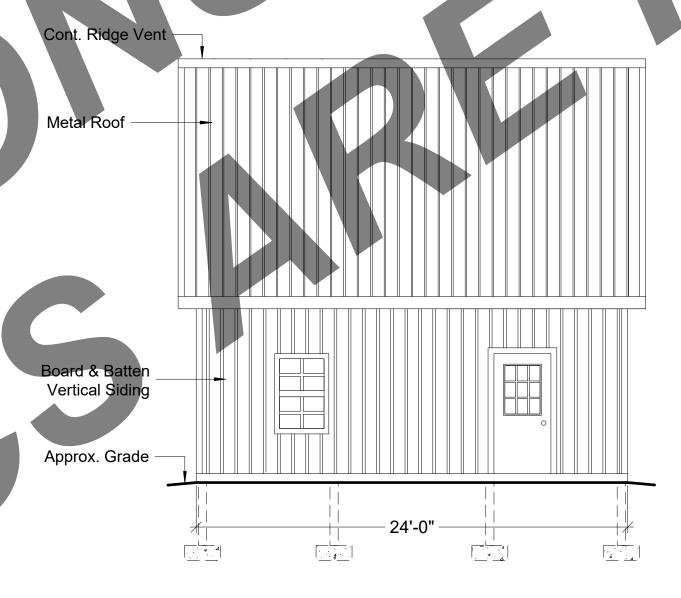



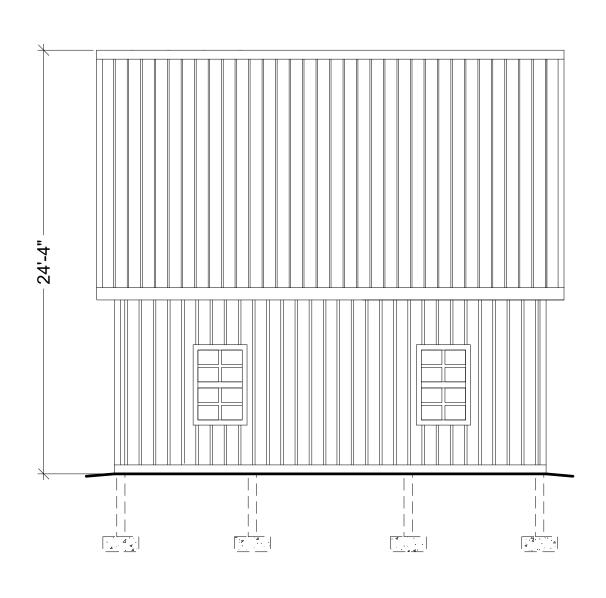

6 RIGHT SIDE ELEVATION
???

BUILDERS' INFORMATION

FILE INFO.

NOTES ON COPYRIGHT
THIS DRAWING IS COPYRIGHTED AND MAY ONLY BE
USED TO CONSTRUCT THE BUILDING AS INTENDED
YOU MAY NOT SELL. RESELL OR USE THIS DRAWING
FOR ANY COMMERCIAL USE. THIS DRAWING MAY
ONLY BE USED FOR PERSONAL USE.

24' x 24' BARN STYLE GARAGE FOR

SEAL

PROJECT NO.

DRAWN BY

FILE INFO.

REVISIONS

DATE


DRAWING TITLE
FLOOR PLAN


SHEET NO.


LOFT PLAN

**A.1** 

EXTERIOR ELEVATIONS

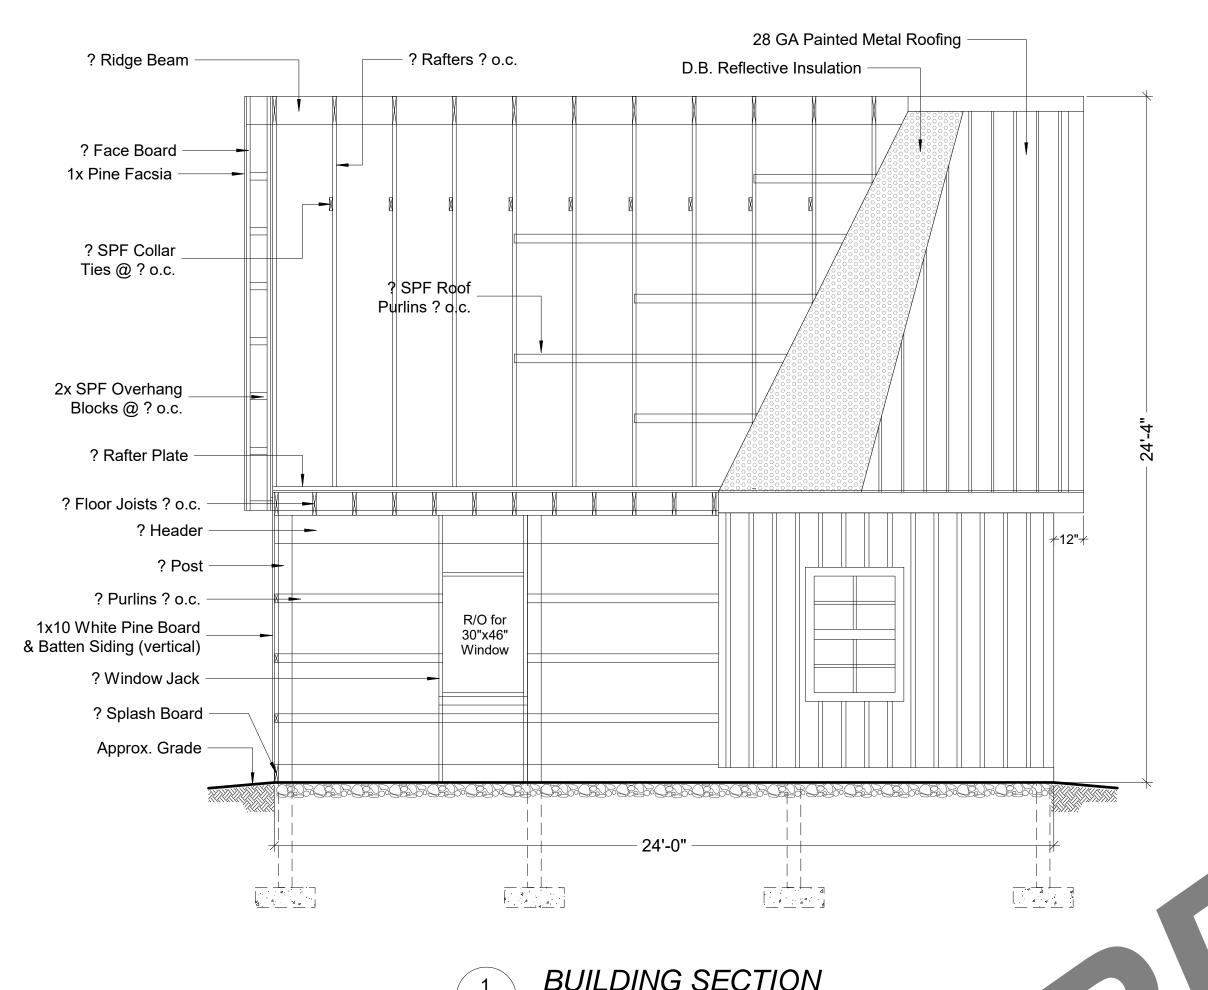

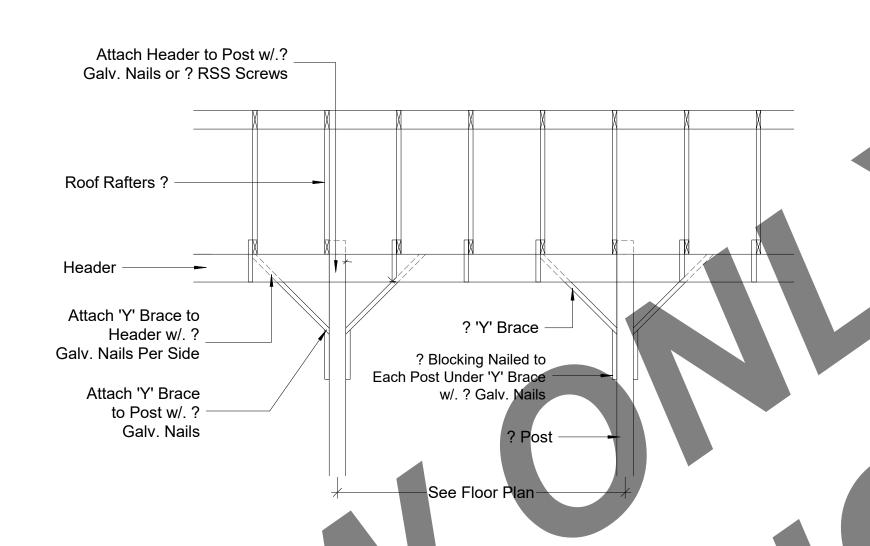

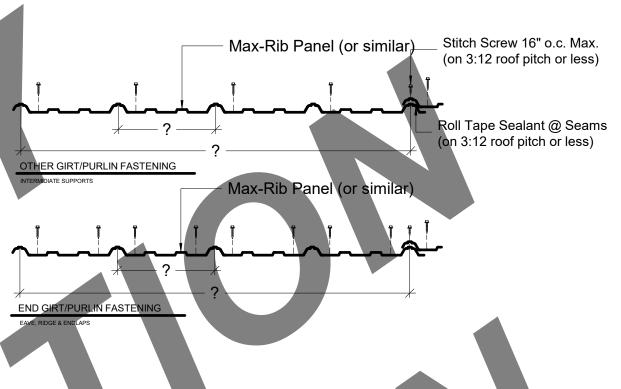

FILE INFO.

RN STYL FOR

PROJECT NO.

DRAWN BY

FILE INFO.

REVISIONS

DATE

DRAWING TITLE

SHEET NO.

WALL SECTION
'Y' BRACE DETAIL
LEAN-TO DETAIL

**BUILDING SECTION** 

**A.2** 


TYP. FRMG. & STITCH
FASTENER PATTERNS
A.2 USE ROLL TAPE & STITCH SCREWS ON 3/12 PITCH OR LESS

TYP. 'Y' BRACE DTL.


- ? Plyood Floor Pine Fascia & Soffit ? SPF Rim Board (attached to joist ends) ? Headers (attach - ? PF Floor Joists ? o.c. to post w/. ? galv. nails each side @ each post 1x10 Pine Board & Batten Siding ? SPF Wall Purlins ? o.c. ? Post -? Splash Board -Approx. Grade Conc. FTG. - Size Varies
See Plan 1/A.1 for Sizes

? SPF Rafters ? o.ç



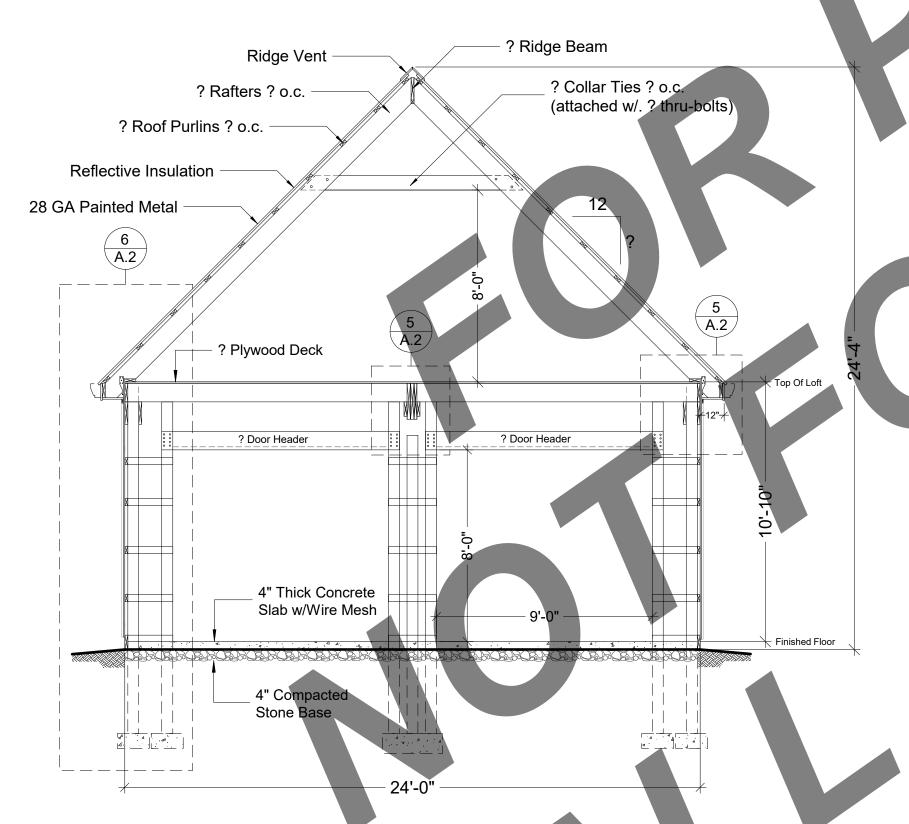



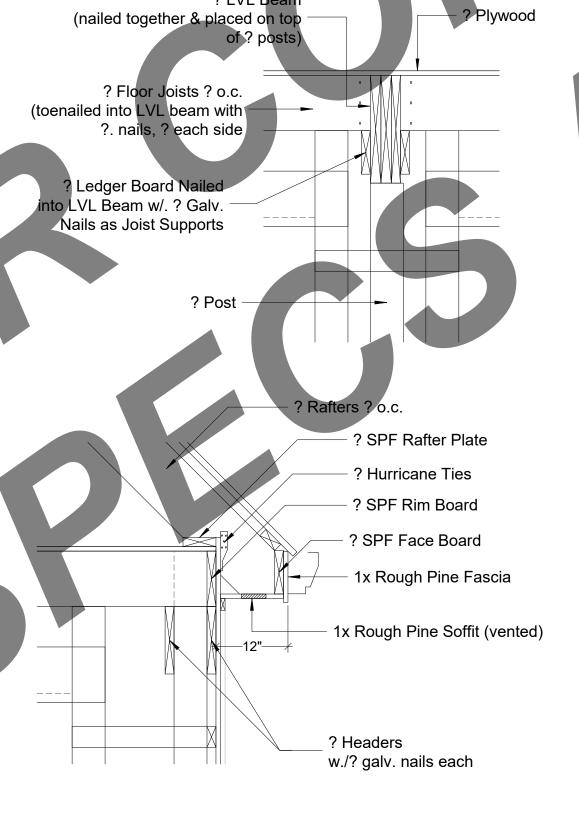



6 WALL SECTION
A.2 ???

